

GARAGE DOOR OPENER



210mm



WARNING: IT IS VITAL FOR THE SAFETY OF ALL PERSONS INSTALLING AND USING THIS OPENER TO FOLLOW THE INSTALLATION INSTRUCTIONS AND SAFETY WARNINGS. FAILURE TO COMPLY MAY RESULT IN SERIOUS PERSONAL INJURY AND/OR PROPERTY DAMAGE AND FAILURE OF THE OPENER SYSTEM

INSTALLATION & OWNERS MANUAL

1.Functions

Micro intellectual control — One button to control open, stop and close.

The light is on while opening or closing the door,

three minutes later the light is off automatically. The

unit running is controlled by computer program. Test the

force of open or close the door, the optional function is

photo beam, auto-close, lock door, etc. The door

pauses momentarily then rebounds when it reaches the

hinders on the closing way. The protecting functions are

overload, over hot or low power input, etc.

DC motor — Low noise, soft start, slow stopping to protect the unit and make sure it can be used for a long time.

LED display — Working situation can be shown on the LED screen.

Decoding — Rolling code.

Manual Disengagement— Open and close the door by hand without power.

Optional Functions — Photo beam, battery backup, wall button and flash light.

WARNING

Do not operate this opener unless you are trained and authorized.


If you have questions, please call professionals.

2.Technical Specifications


Power Input	230V AC ±10% 50~60Hz	Reception frequency	433.92MHz
Motor	24V DC	Decoding	Rolling Code
Working Temperature	>20℃, <+50℃	Transmitter power	27A 12V Battery
Relative Humidity	≅90%	Globe	LED
Open and close force	600N 800N 1000N 1200N	Courtesy light time	3 minutes

3.Installation

3.1 Recommended Tools

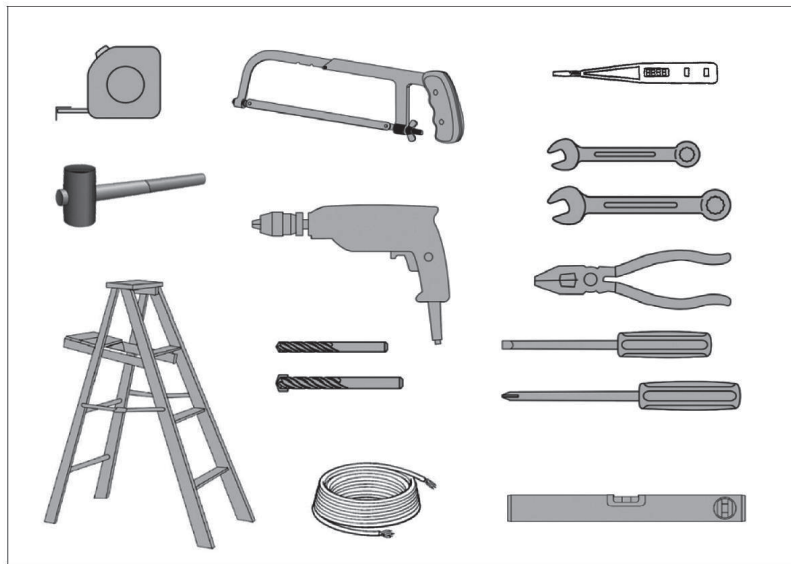

3.2 Installing the Operator and Rail

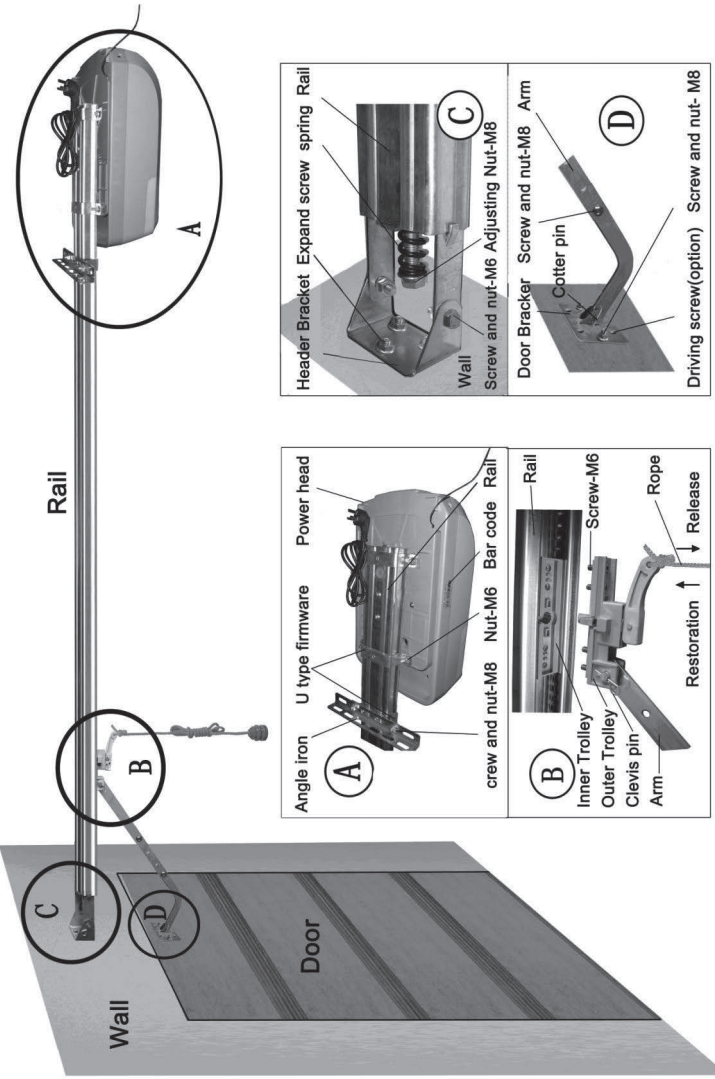

* SUPER IMPORTANT INSTRUCTION

To avoid the original limits loosing ,this mechanical limit stopper must be installed to ensure the trolley be able to hit it in every fully opening ; It must be tightly mounted and not allowed to move when trolley crash .


Please refer to below installation steps:

1. Prepare the mechanical limit stopper ,check how it will be assembled ;


2. Make the limits setting (UP & DOWN) ,when door is in fully opening position, put the mechanical limit stopper into the rail close the trolley

(must make sure it touches the trolley)

3. Tighten the screw M6 * 10 first,Then tighten 2 screws M6 * 14.make sure mechanical stopper clamp the rail and not able to move when trolley crash .

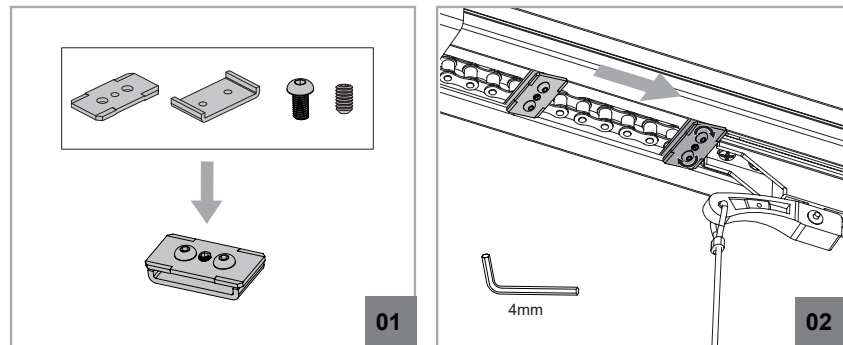

4.Control panel

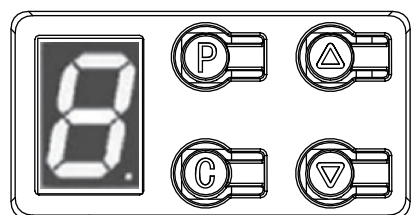




P - SET

Δ - UP

∇ - DOWN

C - CODE

5.Optional Terminals and Connections

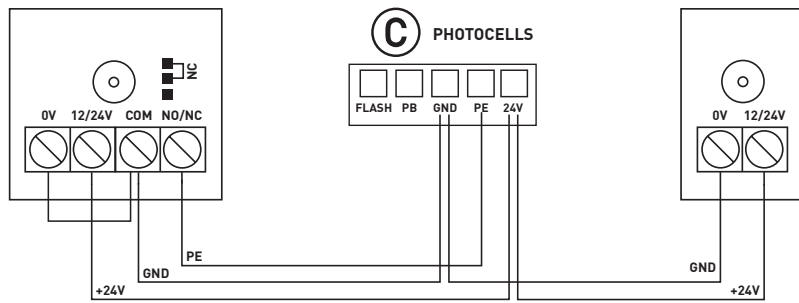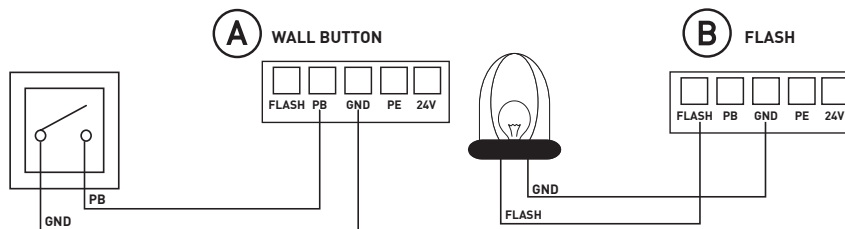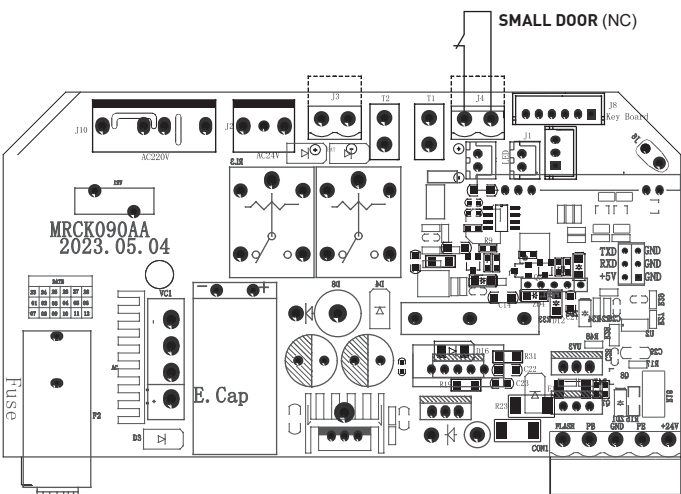

ENVIRONMENT FRIENDLY DISPOSAL



You can help protect the environment!
Please remember to respect the local regulations:
hand in the non-working electrical equipments to
an appropriate waste disposal center.

6.Programming the Operator

6.1	Preparing	
6.1.1	Keep trolley locked, pull and push the door by hand, make sure the trolley connects with the shuttle.	
6.1.2	Turn on the power, the courtesy light is on for several seconds. Meanwhile,LED display will show number from "9" to "1". Then the operator turns to standby situation.	9 1
6.1.3	At last, it displays "II" or " - ".	II -
6.2	Setting Open and Close Positions	
6.2.1	Press and hold button "P" until display shows "1".	1
6.2.2	Press and hold button " Δ ",	Δ
6.2.3	When the door has reached the open position, press "P" It displays " 2 ".	2
6.2.4	Then press and hold " ∇ ", it flashes " u ". When the door has reached the closed position, press "P" .	u
6.2.5	The door opened and closed automatically to map the open and close sensitivity force requirements.	u u
6.2.6	It displays " II " to show setting is complete.	II
6.3	Self Learning Transmitter	
6.3.1	When the unit has stored 20 codes, it flashes " F ", or preventing coding mistakes, it is necessary to cancel all the stored codes.	F
6.3.2	Press and hold " C " , it displays " • " .	•
6.3.3	Hold more than 8 seconds, it flashes " C " , all the codes were cancelled.	C
6.4	Adding or Changing Transmitters	
6.4.1	Press " C " , it displays " • " .	•
6.4.2	Press a button on the transmitter, then release and press the same button again, " • • " flashes .	• •
6.4.3	Then it displays " II " to show setting is complete. Repeat up steps to code a maximum of 20 different transmitters and/or buttons.	II
6.5	Photo Beam	
6.5.1	Press and hold " ∇ ", it displays " - " .	-

6.5.2	Loosen " P " to show current situation. Press" Δ " once it displays " H ", the photo beam is enabled. Press " ∇ " once, it displays " II ", the photo beam is disabled. Press " P " to confirm and quit.	H II																																	
6.5.3	 If you do not use photo beam device, please make sure it displays " II " , to close this function.	II																																	
6.6	Auto-Close ON/OFF																																		
6.6.1	Press " Δ " until it display " - ".	-																																	
6.6.2	Press the " Δ " or " ∇ " button to adjust the time setting, and it displays "0-9" . "0" means that the AUTO-CLOSE is invalid, and "1-9" means that the time is: 10s, 20s, 30s, 40s, 50s, 60s, 90s, 120s, 180s. Press " P " to confirm.	9 1																																	
6.6.3	 The default setting is " 0 " , " 0 " shows auto-close off. This function works when the door reaches the open position.	0																																	
6.6.4	<table border="1"><tr><th colspan="11">Timing closure automatic - Automatic closing time</th></tr><tr><td>LED</td><td>0</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td></tr><tr><td>Time (sec)</td><td>-</td><td>10</td><td>20</td><td>30</td><td>40</td><td>50</td><td>60</td><td>90</td><td>120</td><td>180</td></tr></table> * Closure automatic reverse - Automatic closing off	Timing closure automatic - Automatic closing time											LED	0	1	2	3	4	5	6	7	8	9	Time (sec)	-	10	20	30	40	50	60	90	120	180	
Timing closure automatic - Automatic closing time																																			
LED	0	1	2	3	4	5	6	7	8	9																									
Time (sec)	-	10	20	30	40	50	60	90	120	180																									
6.7	Force Adjustments																																		
6.7.1	Press and hold " P " , it displays " 3 ".	3																																	
6.7.2	Loosen " P " to show current situation. Press"Δ"to increase the force one degree or press " ∇ " to decrease one degree. Maximum degree is " 9 ",minimum is " 1 " .	9 1																																	
6.7.3	Press " P " to confirm. The default setting is " 5 ".	5																																	
6.7.4	 After finishing all the setting, please check the force to make safe.																																		
6.8	Adjusting Of Opening Force																																		
6.8.1	Press and hold " P " , it displays " 4 ".	4																																	
6.8.2	Loosen " P " to show current situation. Press"Δ"to increase the force one degree or press " ∇ " to decrease one degree. Maximum degree is " 9 ", minimum is " 1 " .	9 1																																	
6.8.3	Press " P " to confirm. The default setting is " 9 ".	9																																	

6.9	Enter The Network Distribution Mode	
6.9.1	Press and hold " P ", it displays " 5 ".	5
6.9.2	Release the button the digital tube displays " c " .the module enters the network configuration state.	c

7.Owners' Guide

7.1	Attention in use	
7.1.1	At the first time of using the door, please test the driving system to see if it moves well. (Test method: unlock the trolley, pull and push the door by hand.)	
7.1.2	Connected with the appropriate power and socket by professionals, and connected the earthing wire with earth.	
7.1.3	Using the transmitters in your sight. Do not stand or walk under a moving door. The transmitters should be out of reaching of children.	
7.1.4	Make sure the door out off fire, moisture, electromagnetism and some other places.	
7.1.5	Check at least twice a year to make sure the door is properly balanced and that all working parts are in good working condition. Adjust the tensile force of chain. Add suitable amount of lubricant to the active.	
7.2	Examination Guide	
7.2.1	Problem	Causes
7.2.2	The chain is noisy.	The chain is too loose.
7.2.3	The motor does not work.	The socket is not well connect or the fuse is broken.
7.2.4	After setting open and close positions, the motor does not work.	The screws of fixing the Hall components are loose or program mistakes.
7.2.5	The door can't be closed.	Photo beam function works.
7.2.6	The wall button works well, but the transmitter doesn't work.	No transmitter learning or transmitter battery is power off.
7.2.7	Transmitter distance is too short.	The transmitter battery is nearly power off.

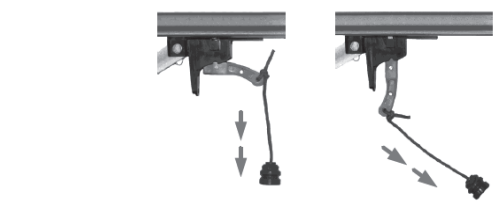


Fig. 3. Manual unblocking of the carriage

In the process of unblocking there can be uncontrolled movement of doors:
- if the door spring are loose or broken;
- if the doors are not balanced;
- if the doors are opened manually the carriage can collide with the drive (during building works limit the doors run in the opening direction);
- in the unblocked position doors can be moved only with medium speed!

- the appliance is not to be used by children or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction
- children being supervised not to play with the appliance

If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

WARNING: Important safety instructions. It is important for the safety of persons to follow all instructions. Save these instructions.

- do not allow children to play with door controls. Keep remote controls away from children;
- watch the moving door and keep people away until the door is completely opened or closed;
- take care when operating the manual release since an open door may fall rapidly due to weak or broken springs, or being out of balance;
- frequently examine the installation, in particular check cables, springs and mountings for signs of wear, damage or imbalance. Do not use if repair or adjustment is needed since a fault in the installation or an incorrectly balanced door may cause injury;
- each month check that the drive reverses when the door contacts a 50 mm high object placed on the floor. Adjust if necessary and rereck since an incorrect adjustment may present a hazard (for drives incorporating an entrapment protection system depending on contact with the bottom edge of the door) ;
- details on how to use the manual release;
- information concerning the adjustment of the door and drive.

WARNING: Important safety instructions. Follow all instructions since incorrect installation can lead to severe injury.

- before installing the drive, remove all unnecessary ropes or chains and disable any equipment, such as locks, not needed for powered operation;
- before installing the drive, check that the door is in good mechanical condition, correctly balanced and opens and closes properly;
- install the actuating member for the manual release at a height less than 1,8 m;
- permanently fix the labels warning against entrapment in a prominent place or near any fixed controls;
- permanently fix the label concerning the manual release adjacent to its actuating member;